



# AMERICAN WITH DISABILITIES ACT - CABINET & INSTALLATION INFORMATION

MODEL / MODEL SERIES	Front/ Rear Load	CABINET DIMENSIONS (inches)			REAR LOAD FACEPLATE (inches)		DOOR SWING (Facing Door)	ADA HEIGHT REQUIRED (Max. Height)	
		H	W	D	H	W		w/o Coin Acc	with Coin Acc
MC100	FL	32.00	8.50	13.00	N/A	N/A	L-R	27.25	N/A
MC200	FL	26.00	13.50	13.00	N/A	N/A	L-R	32.75	25.00
MC300RL	RL	32.00	9.00	13.00	36.00	13.00	L-R	27.00	27.00
MC315RL-CC / MC350RL-TIK-CC	RL	32.00	9.00	13.00	36.00	13.00	L-R	20.00	20.00
MC400RL	RL	28.00	13.75	13.00	32.00	17.75	L-R	30.50	26.00
MC400RL-SLIM	RL	38.50	12.00	18.00	43.00	18.00	L-R	32.00	N/A
MC500RL-DA	RL	32.00	18.00	13.00	36.00	22.00	L-R	25.00	25.00
MC520RL-DA / MC520RL-CC	RL	32.00	18.00	13.00	36.00	22.00	L-R	28.00	24.50
MC620/630/640RL-DA	RL	34.00	29.25	18.00	38.00	33.25	R-L	24.00	24.00
MC700/720/720-DA / MC720-CC	FL	27.88	17.00	13.00	N/A	N/A	R-L	30.50	30.50
MC820/830/840-DA	FL	34.00	26.00	18.00	N/A	N/A	R-L	26.00	26.00
MC920/930/940-DA / MC900-CC	FL	50.00	28.00	18.00	N/A	N/A	R-L	N/A	N/A
MCM100/-CA/-TIK	FL	13.63	10.75	13.32	N/A	N/A	TOP	N/A	N/A
<b>MODULAR SERIES</b>									
BX1000 (UNI)	FL	27.88	16.75	12.00	N/A	N/A	R-L	31.00	N/A
BX1000RL (UNI)	RL	27.88	16.75	12.00	31.88	20.75	R-L	31.00	N/A
BCX1000 (UNI)	FL	36.00	15.75	18.00	N/A	N/A	R-L	23.00	23.00
BCX1000RL (UNI)	RL	36.00	18.00	18.00	40.00	22.00	R-L	23.00	22.00
<b>UNINOTE</b>									
BX1010/1020/1030/1040 (FUJ)	FL	28.00	19.00	18.00	N/A	N/A	R-L	30.00	N/A
BX1010/1020/1030/1040RL (FUJ)	RL	27.88	16.75	18.00	31.88	20.75	R-L	28.00	N/A
BCX1010/1020/2010/2020 (FUJ)	FL	38.00	18.00	18.00	N/A	N/A	R-L	20.50	17.50
BCX1010/1020/2010/2020RL (FUJ)	RL	36.00	18.00	18.00	40.00	22.00	R-L	24.00	22.50
<b>FUJITSU</b>									
BX1010/1020-G (GLORY)	FL	32.00	14.75	21.50	N/A	N/A	R-L	27.00	N/A
BX1010RL/BX1020RL (GLORY)	RL	31.00	18.00	18.00	35.00	22.00	L-R	27.00	N/A
<b>GLORY</b>									
SC101 / SC102	FL	34.00	15.38	34.00	N/A	N/A	R-L	18.00	18.00
SC21RL / SC22RL	RL	34.00	18.00	18.00	38.00	22.00	R-L	24.75	24.75
SC33RL / SC34RL	RL	34.00	29.25	18.00	38.00	33.25	R-L	24.75	24.75
SC32RL-DA / SC34RL-DA	RL	34.00	29.25	18.00	38.00	33.25	R-L	24.75	24.75
SC43 / SC44	FL	34.00	26.00	18.00	N/A	N/A	R-L	19.50	19.50
SC42-DA / SC44-DA	FL	34.00	26.00	18.00	N/A	N/A	R-L	19.50	19.50
SC61 / SC62	FL	30.13	23.25	11.75	N/A	N/A	R-L	25.25	25.25
<b>SYSTEM 500 / 600</b>									

ADA REQUIRES THAT THE MAXIMUM REACH POINT DOES NOT EXCEED 48" FROM THE FLOOR

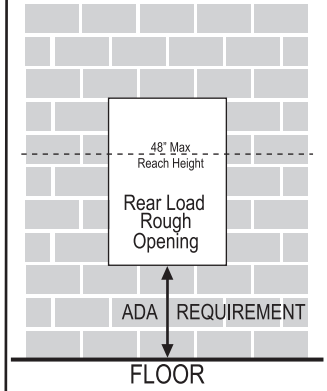

**EXAMPLE:**  
MC300RL installed in a wall, The measurement from the bottom of the rough opening to the floor, should not exceed 27 inches - in order to meet the ADA max reach requirement of 48 inches.

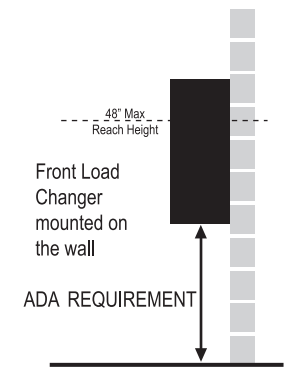

**Standard**  
Change-Makers, Inc.

3130 N. Mitthoeffer Road  
Indianapolis, IN 46235-2400  
Toll Free: 800-968-6955  
Phone: 317-899-6966  
Fax: 317-899-6977  
www.standardchange.com

